

1301519

tarmac rally - race

Bmw M42

I-4cyl 1.8L 16v DOHC (DTH/DTH)



intake

exhaust


camshaft data:

lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 290°	282°
duration @ 1.0mm	: 252°	244°
valve lift	: 12.00mm	11.50mm
cam lift	:	
lobe angle	: 106°	106°
timing @ 1.0mm	: 20° / 52°	48° / 16°
valve lift @ TDC	: 3.75mm	3.20mm

parts setup:

cam wheels :	:	:
follower	: CC005	: CC005
valve lash	: TS102	: TS102
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99122/s	: 99122/s
lower retainer	: 99452/S	: 99452/S
exterior spring	: PAC-E95009	: PAC-E95009
interior spring	: PAC-I95009	: PAC-I95009
fitted load / length	: 41kg @ 34.5mm	: 41kg @ 34.5mm
max. load / lift	: 118kg @ 14.0mm	: 118kg @ 14.0mm

REMARKS :

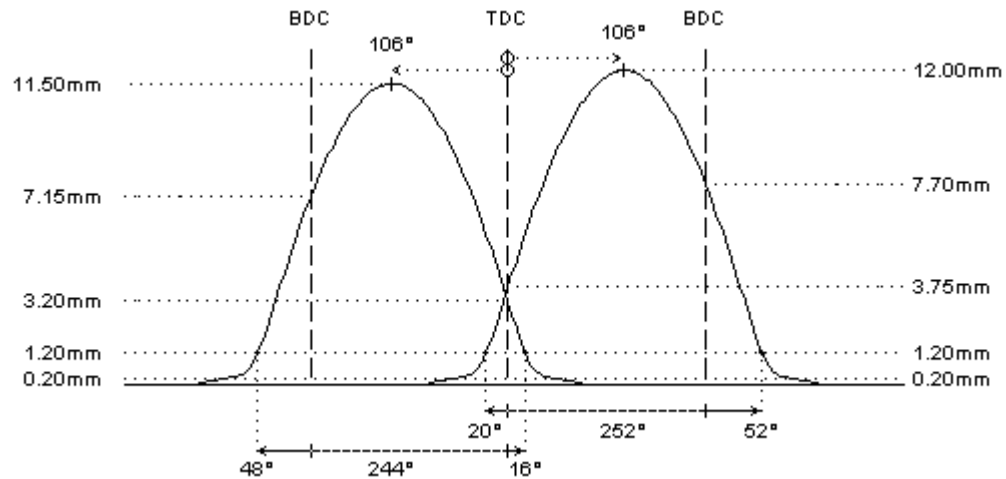

REMARKS :

- # - steel billet camshafts
- gundrilled for weight reduction
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # valve clearance is to be adjusted using mechanical lash caps. these can have different shapes according the application:
 - plates available in different diameters and thickness
 - cups for different valve stem diameters. these center on either tappet or valve stem
 - other specific shapes available on request
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors