

# 1301520

tarmac rally - race

Bmw M42

I-4cyl 1.8L 16v DOHC (DTH/DTH)



### intake

### exhaust


#### camshaft data:

lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 298°	290°
duration @ 1.0mm	: 260°	252°
valve lift	: 12.50mm	12.00mm
cam lift	:	
lobe angle	: 106°	106°
timing @ 1.0mm	: 24° / 56°	52° / 20°
valve lift @ TDC	: 4.30mm	3.70mm

#### parts setup:

cam wheels :	:	:
follower	: <b>CC005</b>	: <b>CC005</b>
valve lash	: <b>TS102</b>	: <b>TS102</b>
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: <b>99122/s</b>	: <b>99122/s</b>
lower retainer	: <b>99452/S</b>	: <b>99452/S</b>
exterior spring	: <b>PAC-E95009</b>	: <b>PAC-E95009</b>
interior spring	: <b>PAC-I95009</b>	: <b>PAC-I95009</b>
fitted load / length	: 41kg @ 34.5mm	: 41kg @ 34.5mm
max. load / lift	: 118kg @ 14.0mm	: 118kg @ 14.0mm

#### REMARKS :

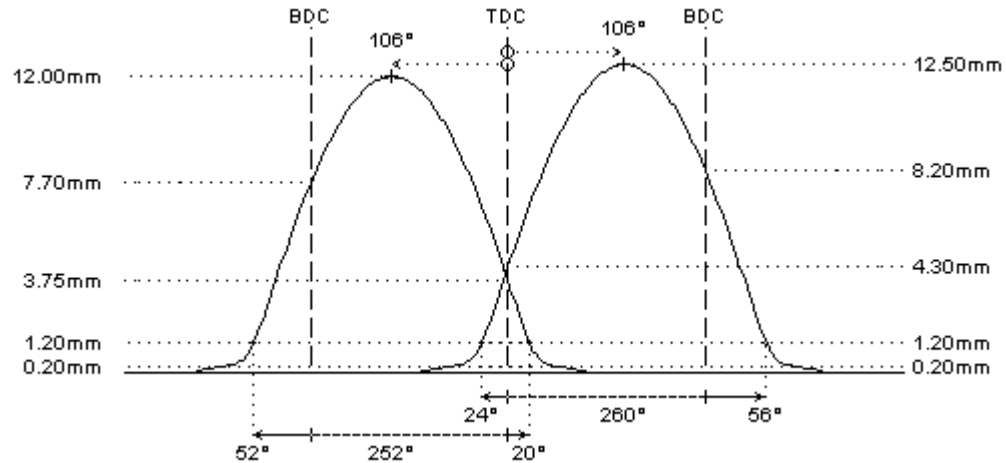

#### REMARKS :

- # - steel billet camshafts  
- gundrilled for weight reduction
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
  - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
  - distance between valve seal and retainer at full lift must be 0.6mm at least
  - minimum valve spring travel of 1.0mm at full lift must be provided
  - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # valve clearance is to be adjusted using mechanical lash caps. these can have different shapes according the application:
  - plates available in different diameters and thickness
  - cups for different valve stem diameters. these center on either tappet or valve stem
  - other specific shapes available on request
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburettors