


5200109

sport

Porsche general info
B-6cyl 12v SOHC (RP/RP)



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 271°	263°
duration @ 1.0mm	: 232°	223°
valve lift	: 11.45mm	10.00mm
cam lift	: 7.75mm	6.90mm
lobe angle	: 116°	111°
timing @ 1.0mm	: -1° / 53°	41° / 2°
valve lift @ TDC	: 1.15mm	1.40mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-E99859	: PAC-E99859
interior spring	: PAC-I95009	: PAC-I95009
fitted load / length	: 40kg @ 34.5mm	: 40kg @ 34.5mm
max. load / lift	: 108kg @ 13.0mm	: 108kg @ 13.0mm

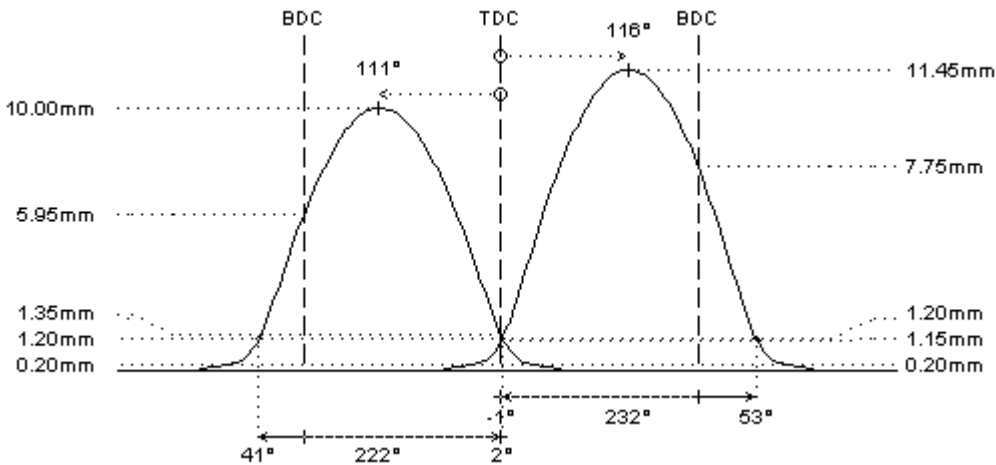

- REMARKS :**
- # - the list contains a selection of the available profiles. Special attention is required due to many evolutions to the 911 engine
 - please read the remarks about the different camshaft executions
 - when ordering, please indicate: engine code, OEM camshaft number, bearing type, cam nose type, auxiliary drive type

REMARKS :

valve spring kit can be developed on request

in most engines, the Catcams springs can replace the original double valve spring (901 10590150) on the original spring retainers (901 10542103 + 901 10546300)