

5500227

hot street - dirt track

Renault 840.725 Alpine (R-1223)

I-4cyl 1.4L 8v OHV (FT/FT)



intake **exhaust**

camshaft data:


lash ramp	: 0.40mm	0.40mm
duration @ 0.1mm	: 286°	286°
duration @ 1.0mm	: 244°	244°
valve lift	: 10.45mm	10.45mm
cam lift	: 6.50mm	6.50mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 12° / 52°	52° / 12°
valve lift @ TDC	: 2.60mm	2.60mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	: O.E.M.	: O.E.M.

fitted load / length	: 24kg @ 37.3mm	: 28kg @ 36.3mm
max. load / lift	: 85kg @ 12.0mm	: 85kg @ 11.0mm

REMARKS :

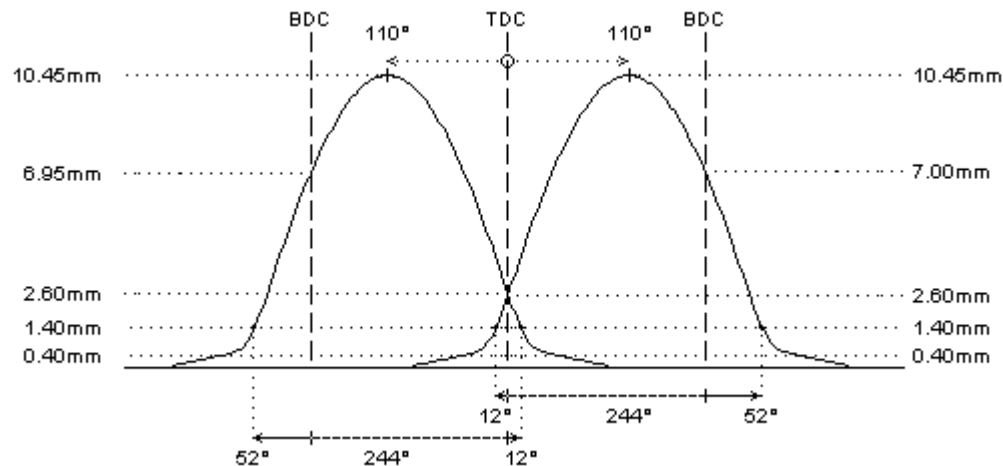

REMARKS :

- # - cam lobe sequence: **■-■-■-■** (crossflow head)
- total length: **446mm** (with water pump drive)
- double chain
- journal diameters: 37.94 - 37.94 - 37.94 - **34.48mm**
- available in steel billet only

- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors