

# 1602502

sport

Nissan SR20DE (T) slipper rocker

I-4cyl 2.0L 16v DOHC (RP/RP)



**intake**                      **exhaust**

**camshaft data:**

lash ramp	: hydro	hydro
duration @ 0.1mm	: 273°	262°
duration @ 1.0mm	: 228°	220°
valve lift	: 11.05mm	10.50mm
cam lift	: 7.10mm	6.80mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 6° / 42°	38° / 2°
valve lift @ TDC	: 1.60mm	1.15mm


**parts setup:**

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

**REMARKS :**

# check std valve spring setup for coil bind length and use valve spring kit if required

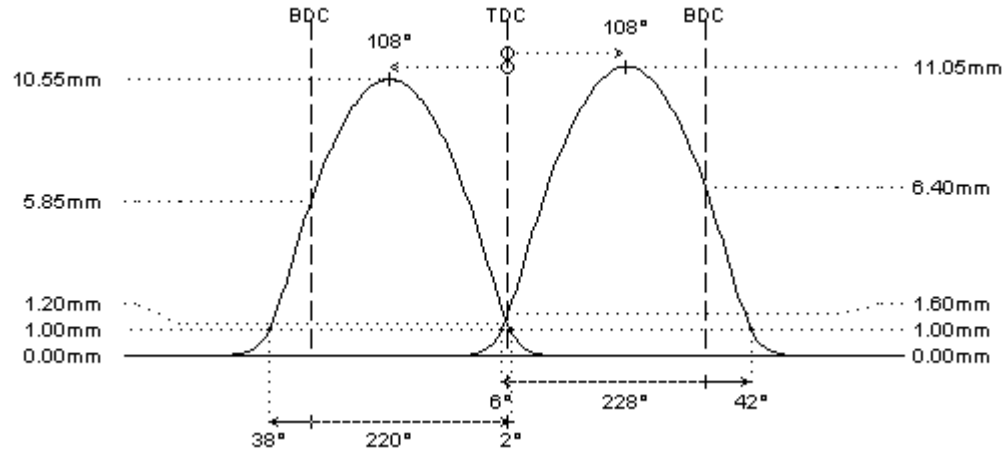

**REMARKS :**

# camshaft only for use **with slipper rocker arms** (NO rollers!) and **without VVT system** on intake camshaft

# ECU reprogramming required