

4600315

sport

Opel OHC small block (1.2 > 1.6L)

I-4cyl 1.6L 8v SOHC (RPH/RPH)



intake **exhaust**

camshaft data:

lash ramp	: hydro	hydro
duration @ 0.1mm	: 273°	271°
duration @ 1.0mm	: 232°	232°
valve lift	: 11.45mm	11.35mm
cam lift	: 6.55mm	6.50mm
lobe angle	: 106°	102°
timing @ 1.0mm	: 9° / 43°	41° / 11°
valve lift @ TDC	: 1.80mm	2.05mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: ✗ not available	: ✗ not available
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

Many different valve spring setups have been used in these engines.
In most cases, the std spring can be replaced by **PAC-S99863**. Please contact Cat Cams if a different setup must be used due to fitting, coil bind or valve float

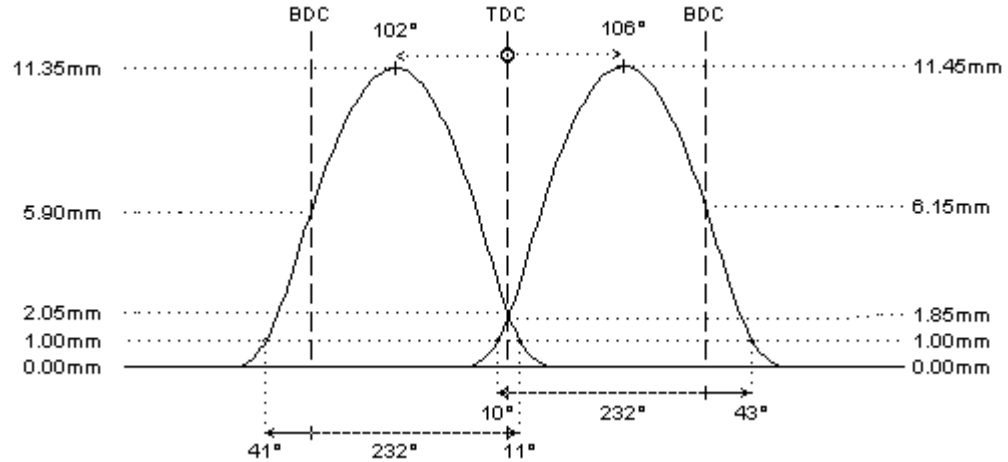

REMARKS :