

5500231

hot street - dirt track

Renault 840.725 Alpine (R-1223)

I-4cyl 1.4L 8v OHV (FT/FT)



intake **exhaust**

camshaft data:


lash ramp	: 0.40mm	0.40mm
duration @ 0.1mm	: 293°	293°
duration @ 1.0mm	: 250°	250°
valve lift	: 10.80mm	10.80mm
cam lift	: 6.75mm	6.75mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 17° / 53°	53° / 17°
valve lift @ TDC	: 3.30mm	3.30mm

parts setup:

cam wheels :	: TRE012	: TRE012
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-E99859	: PAC-E99859
interior spring	: PAC-I99859	: PAC-I99859
fitted load / length	: 34kg @ 37.3mm	: 39kg @ 36.3mm
max. load / lift	: 103kg @ 13.0mm	: 103kg @ 12.0mm

REMARKS :

check distance between valve seal and retainer to be at least 0.6mm at full lift

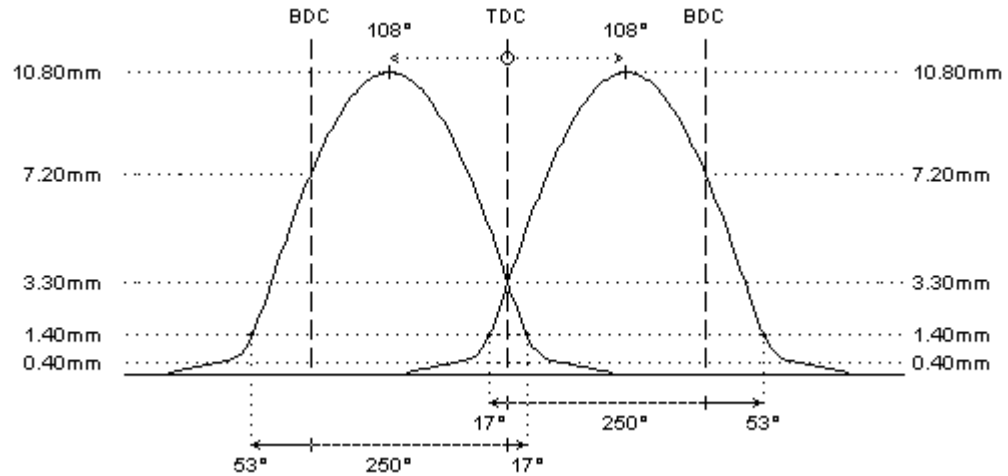

REMARKS :

- # - cam lobe sequence: **II-II-II-II** (crossflow head)
- total length: **446mm** (with water pump drive)
- double chain
- journal diameters: 37.94 - 37.94 - 37.94 - **34.48mm**
- available in steel billet only

- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake

- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburettors