

7902713

hot street - dirt track

Volvo B5234T4 250hp

I-5cyl 2.3L 20v DOHC (DTH/DTH)



intake

exhaust

camshaft data:

lash ramp	: hydro	hydro
duration @ 0.1mm	: 258°	239°
duration @ 1.0mm	: 224°	208°
valve lift	: 10.00mm	8.50mm
cam lift	:	
lobe angle	: 110°	120°
timing @ 1.0mm	: 2° / 42°	44° / -16°
valve lift @ TDC	: 1.25mm	0.10mm


parts setup:

cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	✗ not available	✗ not available
lower retainer :	✗ not available	✗ not available
exterior spring :	✗ not available	✗ not available
interior spring :		

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

check std valve spring setup for coil bind length and use valve spring #
kit if required
valve spring kit can be developed on request

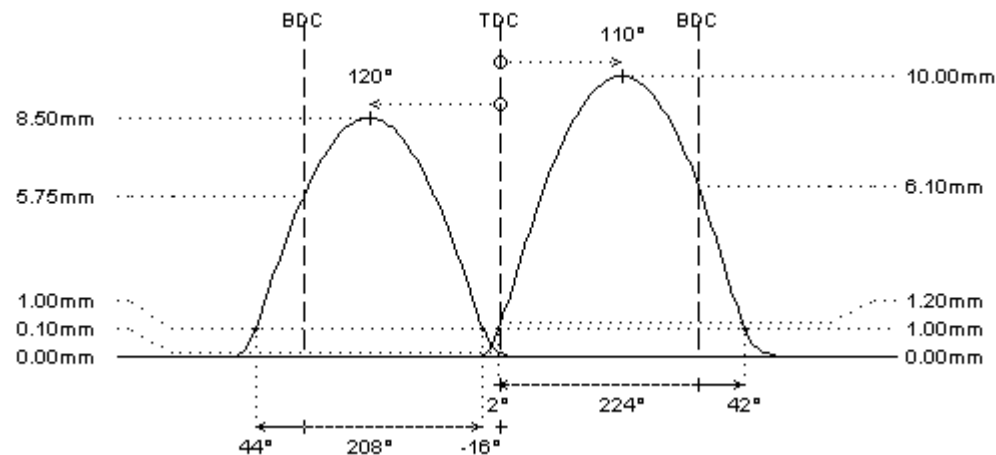

REMARKS :

- # Please double check before ordering:
 - axial thrust width: 4.5mm
 - cam base diameter: 32mm
 - hydraulic cam followers
 - no VVT
- # for BIG TURBO conversion (std to big turbo)